


Shenzhen Bede Mold CO.,Ltd



Factory Address: 98 Industrial Area, Zhongxin Rd., Xinqiao Street, Bao'an District, Shenzhen, China
Office Phone: +8675527084976 Mobile: +8615989309421 Email: kerrykim@szbede.com contact: kerry kim

Hex Head Flange Bolts ISO 1665 (DIN 6921)

The DIN 6721 flange bolt is a hexagon headed bolt or screw incorporating a flange, negating the need for a washer. Flange bolts are a more attractive alternative to their DIN 931 and DIN 933 hex driven counterparts. Typically used where The flange offers protection for the bolted component where the driving tool may otherwise scratch it's surface. Generally manufactured with a full thread, though occasionally some stock may include a partially threaded shank.

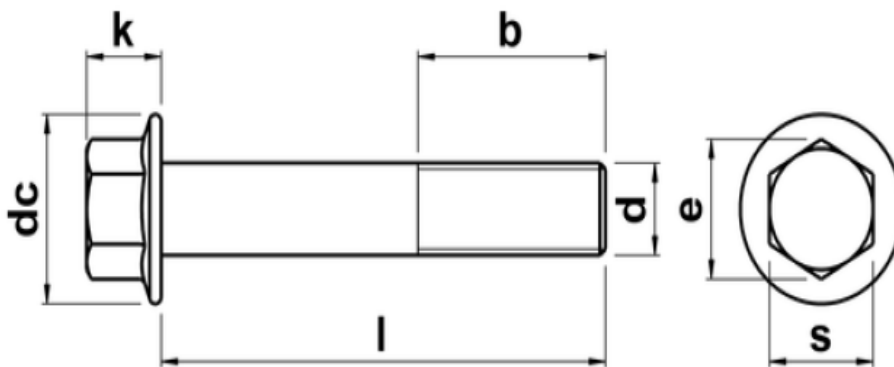

d	b	k max.	s	dc	e
M5	16	5.4	8	11.8	8.71
M6	18	6.6	10	14.2	10.95
M8	22	8.1	13	18.0	14.26
M10	26	9.2	15	22.3	16.50
M12	30	11.5	16	26.6	17.62
M14	34	12.8	18	30.5	19.86
M16	38	14.4	21	35.0	23.15

Contact: whatsapp +8615915396878
Email kerrykim@szbede.com
Website: www.precisionmoldcomponents.com

